

Preliminary

**TECHNICAL SPECIFICATION**  
**MODEL NO : PD121XL1**

Customer's Confirmation

Customer \_\_\_\_\_

Date \_\_\_\_\_

By \_\_\_\_\_

PVI's Confirmation

Dep	FAE	Panel Design	Electronic Design	Mechanical Design	Product Verification	Prepared by
SIGN					張 天 龍	蔡 弘 毅

# **TECHNICAL SPECIFICATION**

## **CONTENTS**

<b>NO.</b>	<b>ITEM</b>	<b>PAGE</b>
-	Cover	1
-	Contents	1
1	Application	3
2	Features	3
3	Mechanical Specifications	3
4	Input / Output Terminals	4
5	Absolute Maximum Ratings	5
6	Electrical Characteristics	5
7	Pixel Arrangement	8
8	Display Color and Gray Scale Reference	9
9	Block Diagram	10
10	Interface Timing	11
11	Power On Sequence	12
12	Optical Characteristics	13
13	Handling Cautions	15
14	Reliability Test	16
15	Packing Diagram	17
-	Revision History	-

## 1. Application

The PD121XL1 model is a 12.1" TFT-LCD module with a 2-CCFL Backlight Unit and a 20-pin 1ch-LVDS interface. This module supports 1024 x768 XGA mode and displays 262,144 colors. The inverter module for the Backlight Unit is not built in.

This module can apply TFT-LCD monitor, TV, Factory application, Amusement Vehicle,... and so on.

## 2. Features

- Wide viewing angle
- High contrast ratio
- Fast response time
- High color saturation
- XGA (1024 x768 pixels) resolution
- Wide operating temperature
- DE (Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface
- RoHS Compliance

## 3. Mechanical Specifications

Parameter	Specifications	Unit
Screen Size	12.1 (diagonal)	inch
Display Format	1024×(R, G, B)×768	dot
Display Colors	262,144	
Active Area	245.76(H)×184.32(V)	mm
Pixel Pitch	0.240(H)×0.240(V)	mm
Pixel Configuration	Stripe	
Outline Dimension	260.5(W)×204.0(H)×12.2(typ.) (D)	mm
Weight	660±10	g
Back-light	CCFL, 2 tube	
Surface treatment	Anti-glare & Hard Coating	
Display mode	Normally Black	

#### 4.Input / Output Terminals

##### 4-1) TFT-LCD Panel Driving

Connector type: JAE-FI-SEB20P-HFE or equivalent.

Pin No.	Symbol	Function	Remark
1	Vcc_IN	Power Supply (5.0V/ 3.3V)	
2	Vcc_IN	Power Supply (5.0V/ 3.3V)	
3	GND	Ground	
4	GND	Ground	
5	RX0-	Differential Data Input, CH0 (Negative )	R0~R5,G0
6	RX0+	Differential Data Input, CH0 ( Positive )	
7	GND	Ground	
8	RX1-	Differential Data Input, CH1 ( Negative )	G1~G5,B0,B1
9	RX1+	Differential Data Input , CH1 ( Positive )	
10	GND	Ground	
11	RX2-	Differential Data Input , CH2 (Negative )	B2~B5,DE,Hsync,Vsync
12	RX2+	Differential Data Input , CH2 (Positive )	
13	GND	Ground	
14	CLK-	Differential Clock Input ( Negative )	LVDS Level clock
15	CLK+	Differential Clock Input (Positive)	
16	GND	Ground	
17	NA	Non-connection	
18	NA	Non-connection	
19	GND	Ground	
20	GND	Ground	

##### 4-2) Backlight driving

Connector Part No.: JST BHR-03VS-1 or equivalent

Pin No	Symbol	Description	Remark
1	HV	Input terminal (Hi voltage side)	Wire color : Pink
2	NA	NA	
3	LV	Input terminal (Low voltage side)	Wire Color : White ,Note 4-1

Note 4-1 : Low voltage side of backlight inverter connects with ground of inverter circuits.

### 5. Absolute Maximum Ratings:

The followings are maximum values, which if exceeded, may cause faulty operation or damage to the unit.

GND=0V, Ta=25°C

Parameters	Symbol	MIN.	MAX.	Unit	Remark
Supply Voltage	V <sub>CC</sub>	-0.3	+4.0	V	
Logic input Voltage	V <sub>in</sub>	-0.3	+2.7	V	Note 5-1

Note 5-1: Permanent damage to the device may occur if maximum values are exceeded.

Function operation should be restricted to the conditions described under Normal Operating Conditions.

### 6. Electrical Characteristics


6-1) Recommended Operating Conditions:

Ta=25 ± 2 °C


Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Power Supply Voltage	V <sub>CC</sub>	3.0	3.3	3.6	V	-
Ripple Voltage	V <sub>RP</sub>	-	-	100	mV	-
Rush Current	I <sub>RUSH</sub>	-	-	1.0	A	Note 6-1
Power Supply Current	White	-	400	-	mA	Note 6-2
	Black	-	730	-	mA	Note 6-3
LVDS differential voltage	V <sub>id</sub>	-100	-	+100	mV	
LVDS common input voltage	V <sub>ic</sub>	-	1.2	-	V	

Note 6-1 The module is recommended to operate within specification ranges listed above for normal function.

Note 6-2 Measurement Conditions:

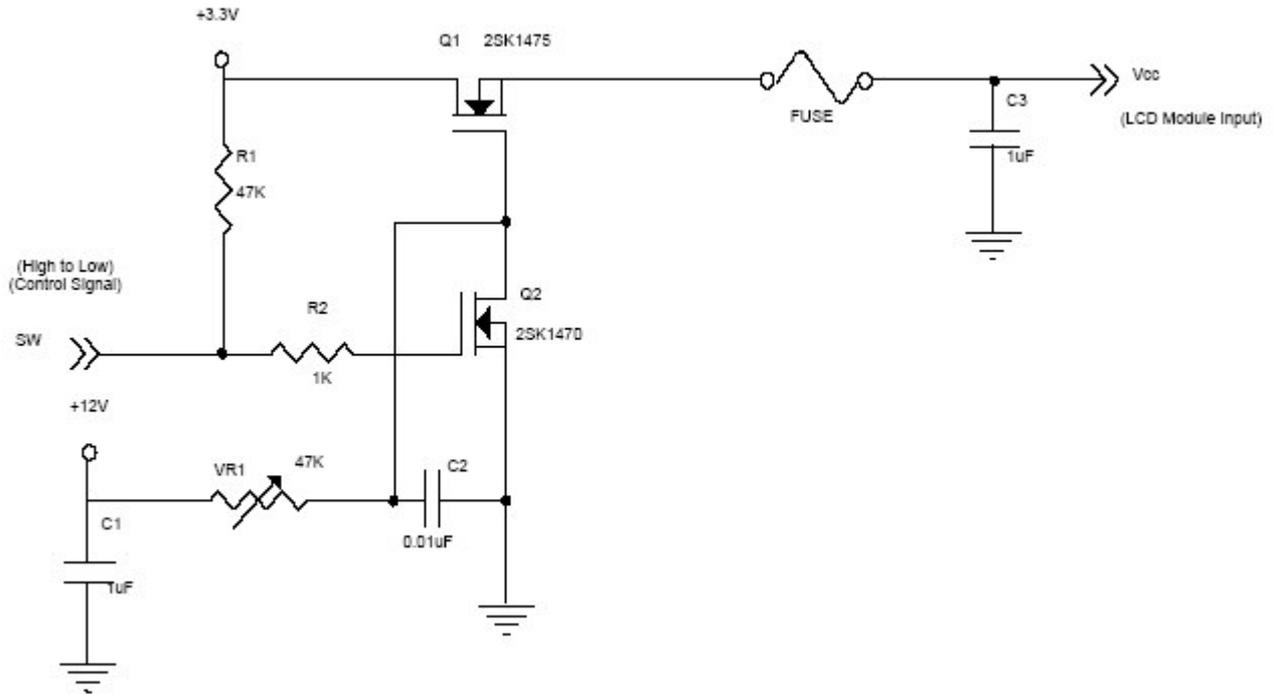


**Vcc rising time is 470μs**

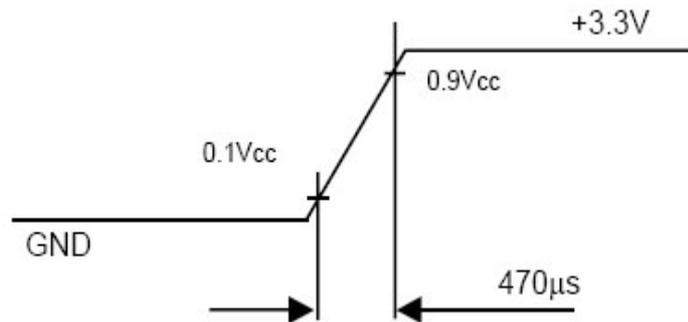

Note 6-3 :The specified power supply current is under the conditions at  $V_{cc} = 3.3\text{ V}$ ,  $T_a = 25 \pm 2\text{ }^\circ\text{C}$ ,  $f_v = 60\text{ Hz}$ , where as a power dissipation check pattern below is displayed.



a. White Pattern

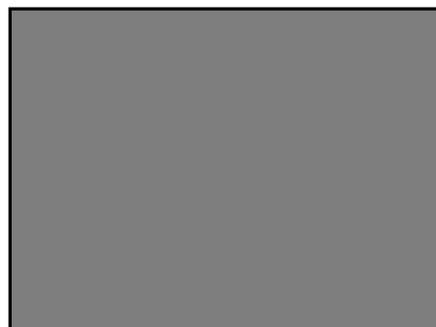


b. Black Pattern

6-2) Recommended Driver Condition for Backlight

Ta=25°C

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp Current	I <sub>L</sub>	2.0	8.0	8.5	mA	Note 6-4
Lamp Voltage	V <sub>L</sub>	450	500	550	Vrms	I <sub>L</sub> =8mA
Lamp frequency	F	45	-	80	KHz	Note 6-5
Power Consumption	P <sub>L</sub>	-	4.0	-	W	Note 6-6
Starting voltage(25°C) (Reference Value)	V <sub>s</sub>	-	-	1010	Vrms	Note 6-7
Starting voltage(0°C) (Reference Value)	V <sub>s</sub>	-	-	1200	Vrms	Note 6-7

Note 6-4 : In order to satisfy the quality of B/L , no matter use what kind of inverter , the output lamp current must between Min. and Max. to avoid the abnormal display image caused by B/L.

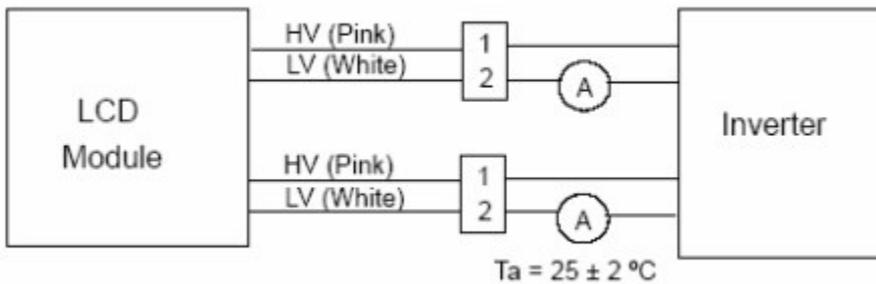


Note 6-5: The lamp frequency may produce interference with horizontal synchronization frequency from the display, which might cause line flow on the display. In order to avoid interference, the lamp frequency should be detached from the horizontal synchronization frequency and its harmonics as far as possible.

Note 6-6 :Backlight lamp power consumption is calculated by I<sub>L</sub>×V<sub>L</sub>.

Note 6-7 : The” Max of starting voltage ” means the minimum voltage of inverter to turn on the CCFL. and it should be applied to the lamp for more than 1 second to start up. Otherwise the lamp may not be turned on.

### 7. Pixel Arrangement

The LCD module pixel arrangement is the stripe.

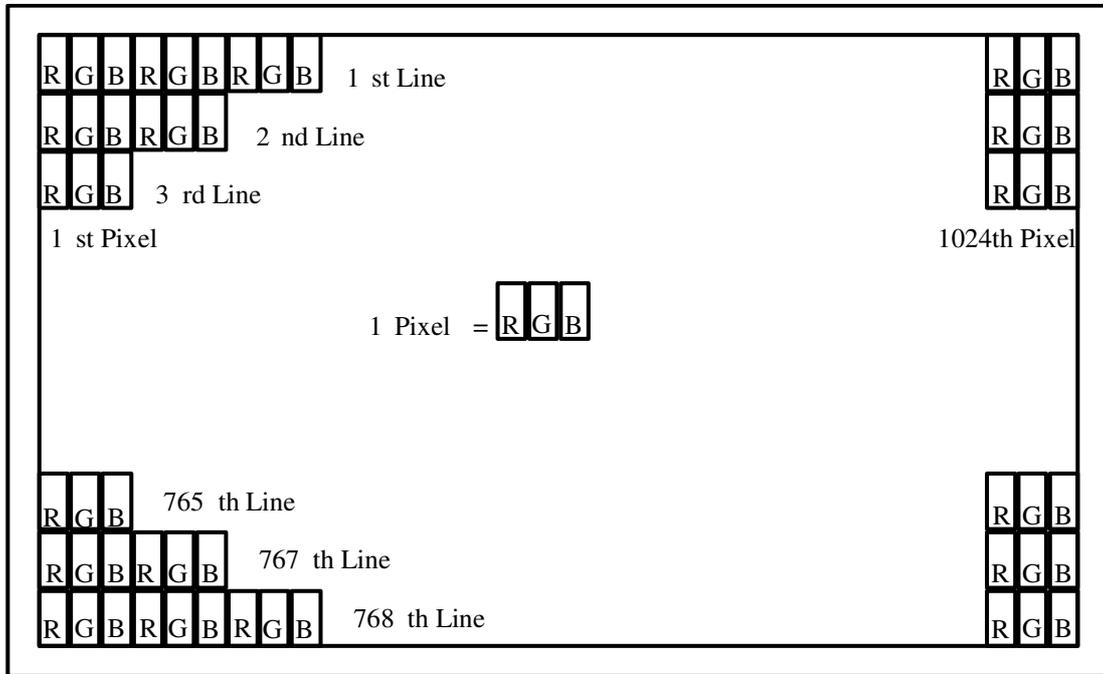


### 8. Display Color and Gray Scale Reference

Color		Data Signal																	
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red(1)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	
	Red(2)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Red(61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	
	Red(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0		
Gray Scale Of Green	Green(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green(1)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	
	Green(2)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Green(61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	
	Green(62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	
Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0		
Gray Scale Of Blue	Blue(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	
Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1		

Note 8-1: Low Level Voltage, 1: High Level Voltage

**9. Block Diagram**

9-1) TFT-module Block Diagram

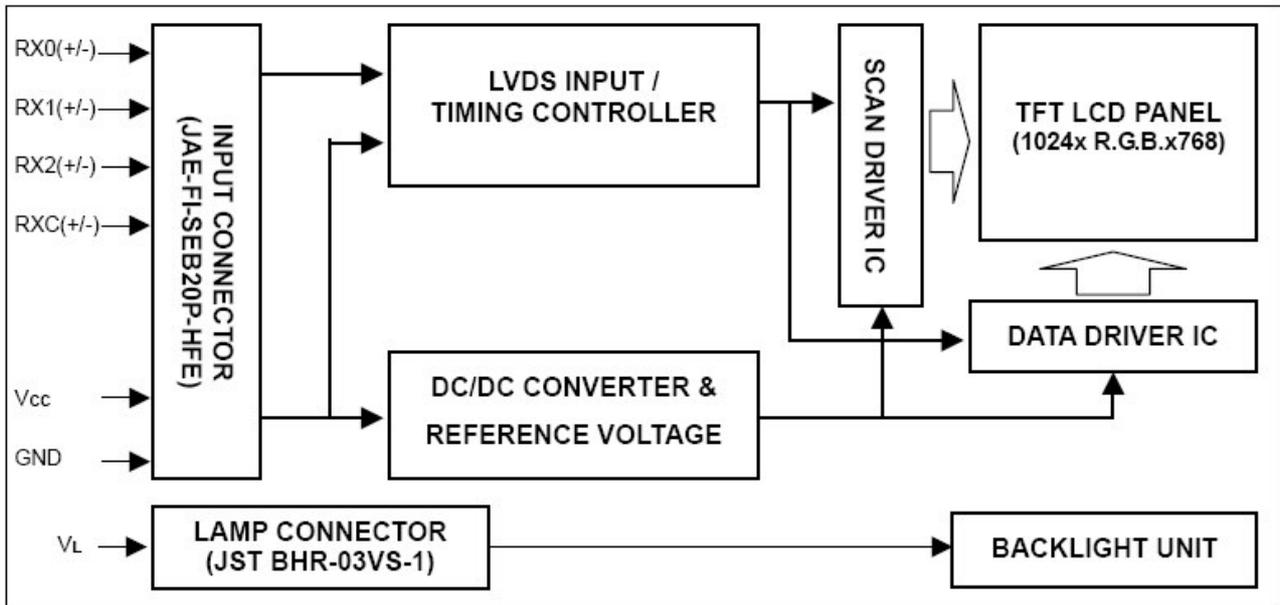


**10. Interface Timing**

10.1) Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK	Frequency	Fc	57.5	64.9	74.4	MHz	
	Period	Tc	13.4	15.4	17.3	ns	
Vertical Active Display Term	Frame Rate	Fr	56	60	75	Hz	
	Total	Tv	774	806	848	Th	Tv=Tvd+Tvb
	Display	Tvd	768	768	768	Th	
Horizontal Active Display Term	Blank	Tvb	Tv-Tvd	38	Tv-Tvd	Th	
	Total	Th	1240	1344	1464	Tc	Th=Thd+Thb
	Display	Thd	1024	1024	1024	Tc	
	Blank	Thb	Th-Thd	320	Th-Thd	Tc	


Note10-1 : Because this module is operated by DE only mode, Hsync and Vsync input signals should be set to low logic level or ground. Otherwise, this module would operate abnormally.

**INPUT SIGNAL TIMING DIAGRAM**

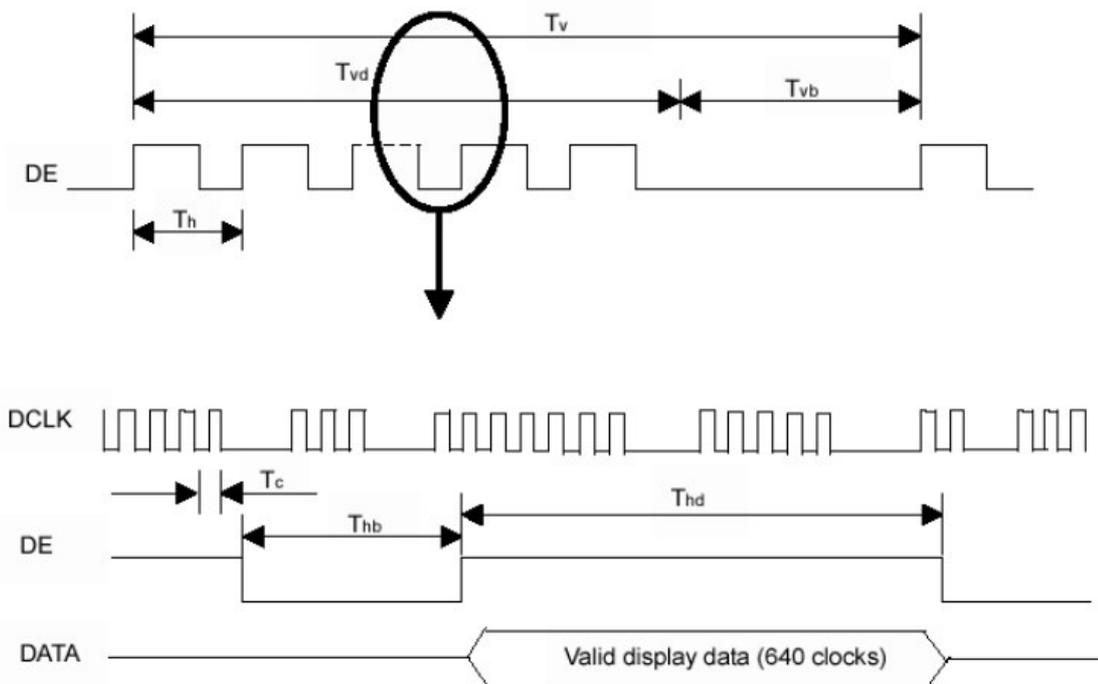

**11. Power On Sequence**

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should follow the conditions shown in the following diagram.

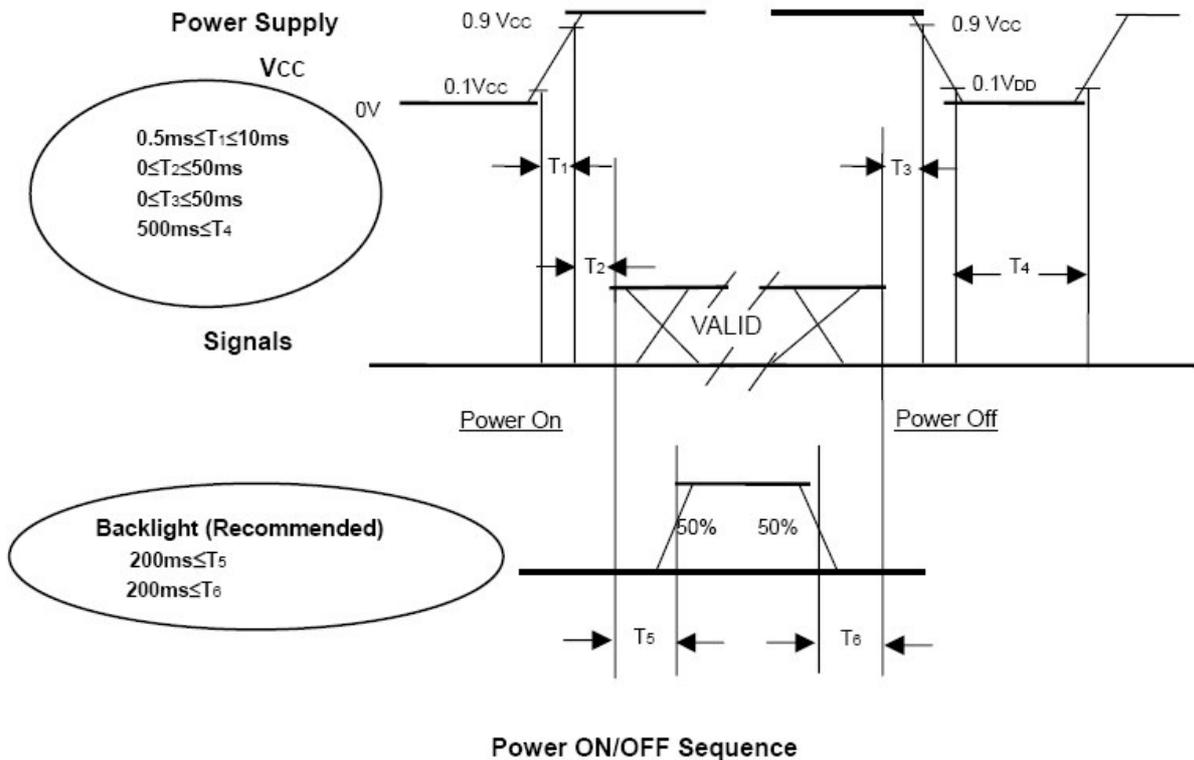

**Power ON/OFF Sequence**

Note 11-1 Please avoid floating state of interface signal at invalid period.

Note 11-2 When the interface signal is invalid, be sure to pull down the power supply of LCD Vcc to 0 V.

Note 11-3 The Backlight inverter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight inverter power must be turned off before the power supply for the logic and the interface signal is invalid.


**12. Optical Characteristics**

12-1) Specification:

Ta=25°C

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remarks
Viewing Angle	Horizontal	$\theta$ 21.22	70	80	-	deg	Note 12-1
	Vertical	$\theta$ 12 (12 o'clock)	70	80	-	deg	
		$\theta$ 11 (6 o'clock)	70	80	-	deg	
Contrast Ratio	CR	$\theta = 0^\circ$	500	700		-	Note 12-2
Response time	Rise	Tr	-	6	11	ms	Note 12-3
	Fall	Tf	-	17	22	ms	
Brightness	L	$\theta = 0^\circ / \varphi = 0$	380	450	-	cd/m <sup>2</sup>	Note 12-4
Lamp Life Time	-	-	50000	-	-	hr	At 8mA
White Chromaticity	x	$\theta = 0^\circ / \varphi = 0$	0.283	0.313	0.343	-	
	y	$\theta = 0^\circ / \varphi = 0$	0.299	0.329	0.359	-	


All the optical measurement shall be executed 30 minutes after backlight being turn-on. The optical characteristics shall be measured in dark room (ambient illumination on panel surface less than 1 Lux). The measuring configuration shows as following figure.

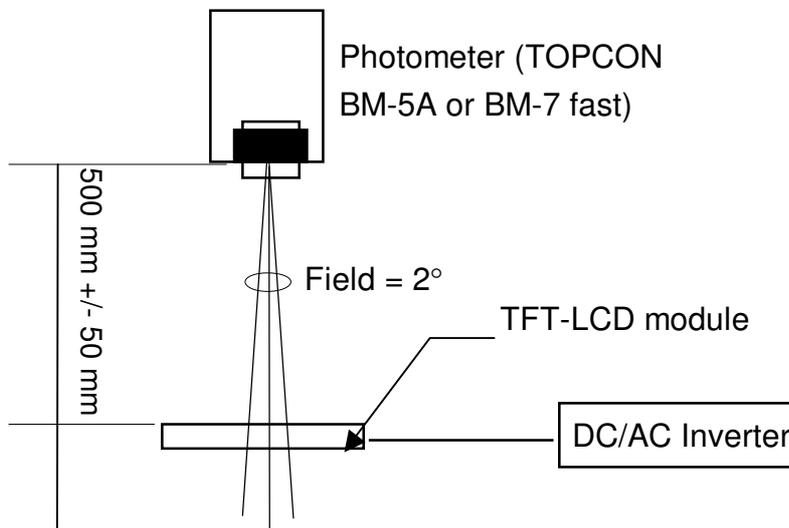


Optical characteristics measuring configuration

Note 12-1: Topcon BM-5A or BM-7 fast luminance meter 2° field of view is used in the testing (after 30 minutes' operation). The typical luminance value is measured at lamp current 8.0 mA.

Note 12-2: The definitions of viewing angles are as follow

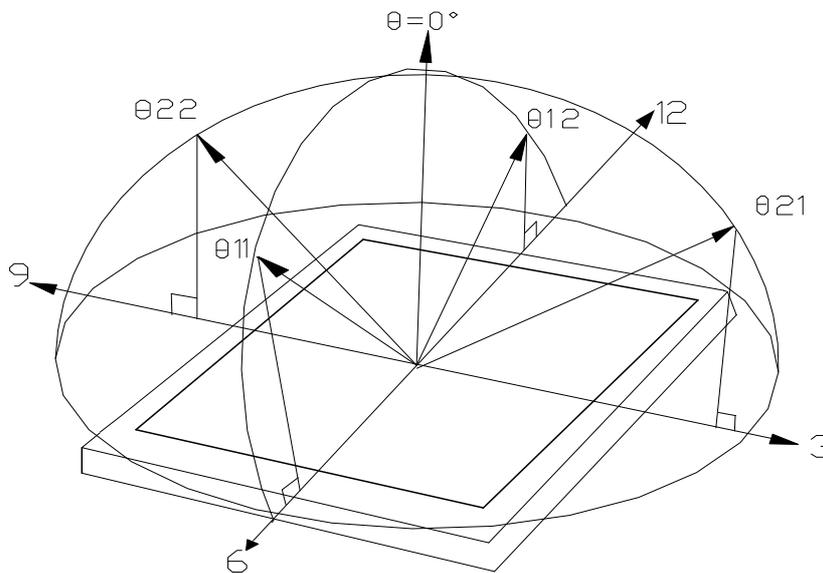

Note 12-3: Definition of Response Time  $T_r$  and  $T_f$

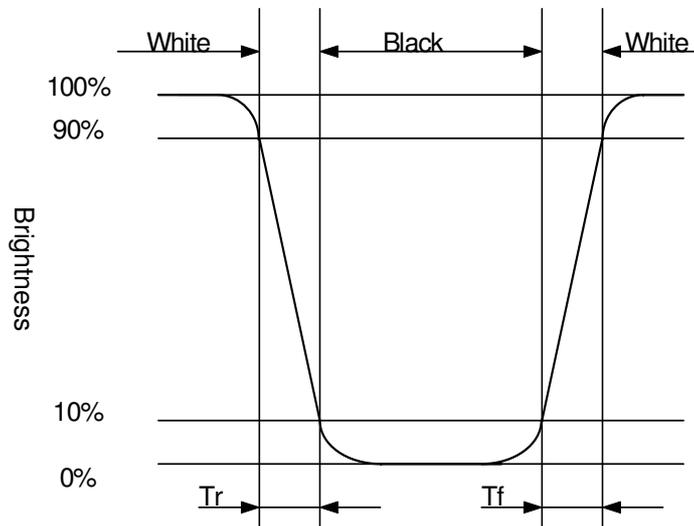

Note 12-4: The definition of contrast ratio  $CR = \frac{\text{Luminance at gray level 63}}{\text{Luminance at gray level 0}}$

### 13. Handling Cautions

#### 13-1) Mounting of module

- a) Please power off the module when you connect the input/output connector.
- b) Please connect the ground pattern of the inverter circuit surely. If the connection is not perfect, some following problems may happen possibly.
  - 1.The noise from the backlight unit will increase.
  - 2.The output from inverter circuit will be unstable.
  - 3.In some cases a part of module will heat.
- c) Polarizer which is made of soft material and susceptible to flaw must be handled carefully.
- d) Protective film (Laminator) is applied on surface to protect it against scratches and dirt. It is recommended to peel off the laminator before use and taking care of static electricity.

#### 13-2) Precautions in mounting

- a) When metal part of the TFT-LCD module (shielding lid and rear case) is soiled, wipe it with soft dry cloth.
- b) Wipe off water drops or finger grease immediately. Long contact with water may cause discoloration or spots.
- c) TFT-LCD module uses glass which breaks or cracks easily if dropped or bumped on hard surface. Please handle with care.
- d) Since CMOS LSI is used in the module. So take care of static electricity and earth yourself when handling.

#### 13-3) Adjusting module

- a) Adjusting volumes on the rear face of the module have been set optimally before shipment.
- b) Therefore, do not change any adjusted values. If adjusted values are changed, the specifications described may not be satisfied.

#### 13-4) Others

- a) Do not expose the module to direct sunlight or intensive ultraviolet rays for many hours.
- b) Store the module at a room temperature place.
- c) The voltage of beginning electric discharge may over the normal voltage because of leakage current from approach conductor by to draw lump read lead line around.
- d) If LCD panel breaks, it is possibly that the liquid crystal escapes from the panel. Avoid putting it into eyes or mouth. When liquid crystal sticks on hands, clothes or feet. Wash it out immediately with soap.
- e) Observe all other precautionary requirements in handling general electronic components.
- f) Please adjust the voltage of common electrode as material of attachment by 1 module.

**14. Reliability Test**

No	Test Item	Test Condition
1	High Temperature Storage Test	Ta = +80°C, 240 hrs
2	Low Temperature Storage Test	Ta = -40°C, 240 hrs
3	High Temperature Operation Test	Ta = +70°C, 240 hrs
4	Low Temperature Operation Test	Ta = -30°C, 240 hrs
5	High Temperature & High Humidity Operation Test	Ta = 60°C, 90%RH, 240 hrs (No Condensation)
6	Thermal Cycling Test (non-operating)	-40°C, 30min→+80°C, 30min , 100Cycles,1hrs/cycle
7	Vibration Test (non-operating)	1.5G,10 ~ 300 Hz,10min/cycle ,3cycles each X, Y, Z
8	Shock Test (non-operating)	220G, 2ms, half sine wave Direction: ±X, ±Y, ±Z Cycle: 1 time
9	Electrostatic Discharge Test (operating)	150pF, 330Ω, 1sec/cycle condition 1: Panel contact ±8KV condition 2: Panel non-contact ±15KV


Ta: ambient temperature

Note : The protective film must be removed before temperature test.

[Criteria]

NO display malfunctions.

**15. Packing Diagram**

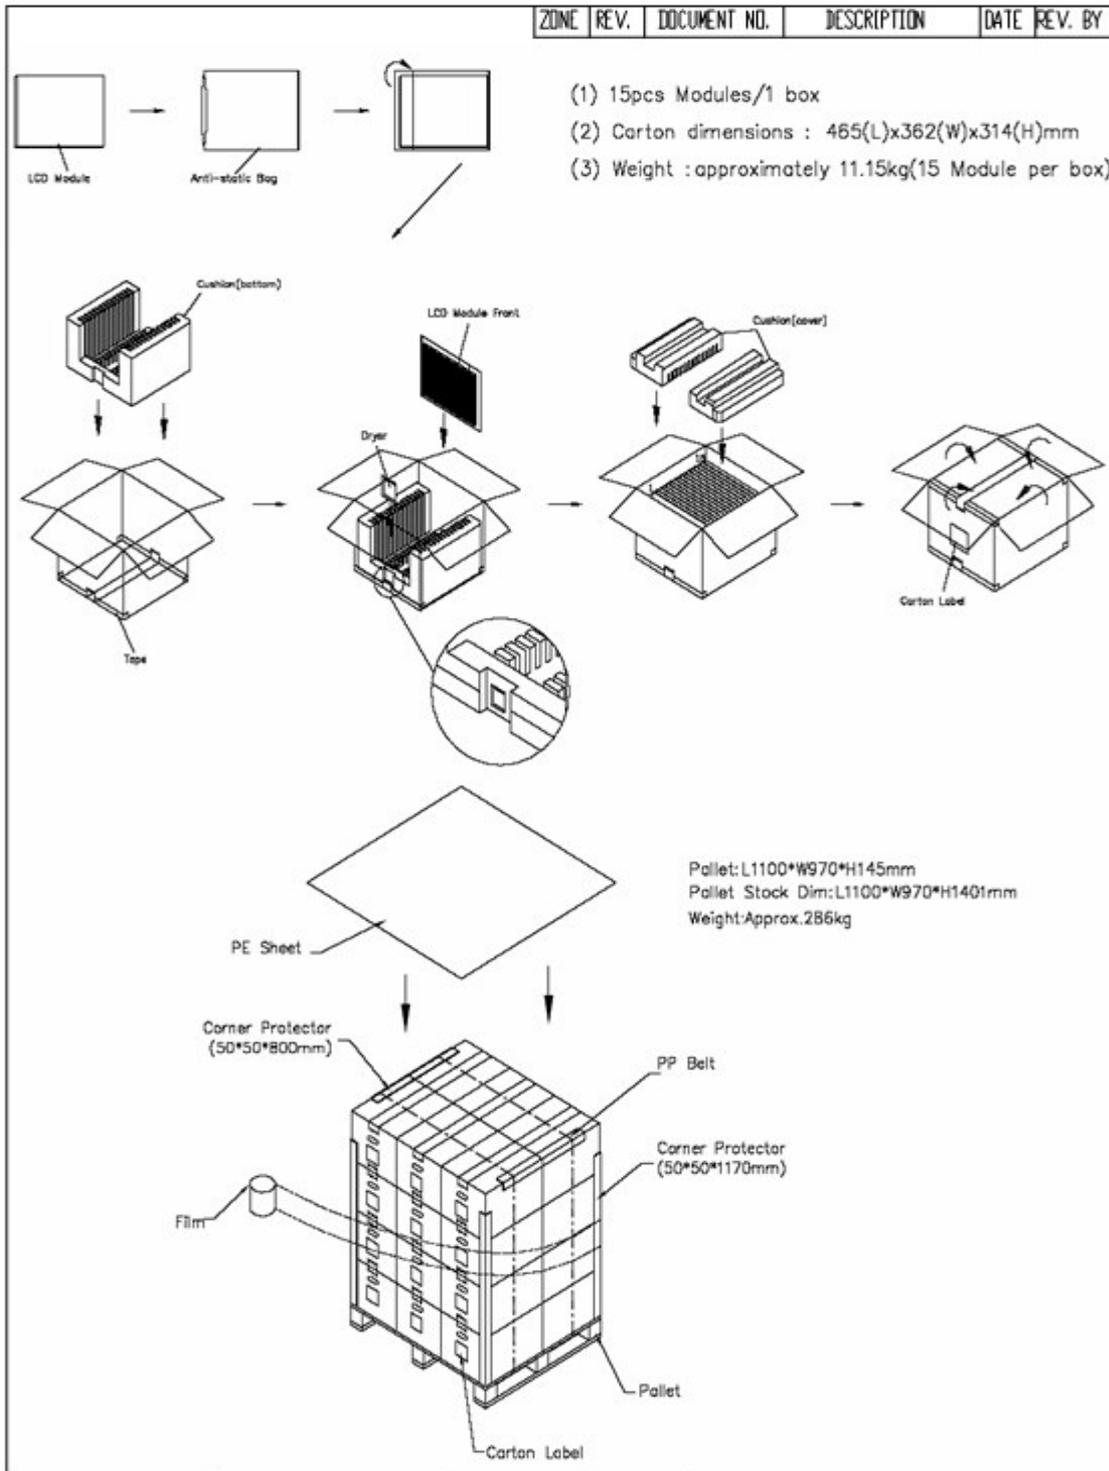

MTL SPEC.		UNSPECIFIED TOL. ANGLE ROUGHNESS		REMARK		元太科技工業股份有限公司 Prime View International Co., Ltd.	
APPROVE		SCALE	UNIT	SHEET	DWG TITLE		
CHECK				1 OF 1	PD121XL1 PACKING DRAW		
DESIGN		MTL NO.		DWG NO.		REV.	A4 SIZE

---

## Revision History

<b>Rev.</b>	<b>Issued Date</b>	<b>Revised Contents</b>
0.1	June,22,06	Preliminary SPEC