



P3012-02A /P3012-01A Projected Capacitive Touch Solution Datasheet

Preface

Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties regarding the contents of this manual and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Moreover, the manufacturer reserves the right to revise this publication or make changes in the specifications of the product described within it at any time without notice and without obligation to notify any person of such revision.

Trademarks

AMT is the registered trademark of Apex Material Technology. Corp. PenMount is the registered trademark of Salt International Corp. Microsoft, and Windows are registered trademarks of Microsoft Corp. Other product names used in this manual are the properties of their respective owners and are acknowledged.

Copyright

This publication, including all photographs, illustrations and software, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without the express written consent of the manufacturer.

Copyright 2013 © Apex Material Technology Corp. All rights reserved.

Revision Table

Date	Revision	Changes
2013/08/22	1.0	Initial Release

Table of Content

Preface.....	i
Disclaimer	i
Trademarks.....	i
Copyright	i
Revision Table.....	i
Table of Content.....	ii
Chapter 1: Scope.....	1
1.1 Products	1
1.2 Part no. Definition	1
1.3 Serial no. Identification	1
Chapter 2: Product Specifications	2
2.1 Mechanical Specification	2
2.2 Mechanical Dimension	3
2.2.1 Touch Panel Mechanical Drawing and Real Product View	3
2.2.2 PM1201A Control Board Mechanical Size and Rear/ Front View	5
Chapter 3: PM1201A Control Board Hardware Specifications	6
3.1 Interface Specifications	6
3.2 Control Board System Block Diagram.....	6
3.3 Interface.....	7
3.3.1 USB Interface and Data Communication	7
3.3.2 RS-232	7
Chapter 4: PenMount PCI Controller IC Specifications.....	8
4.1 General Descriptions.....	8
4.2 Control IC Features	8
4.3 Firmware Features	8
4.4 Controller IC Pin out	9
Chapter 5: Software Drivers & PenMount Utility	10
5.1 Available Drivers & Where to Download.....	10
5.2 PCIMSet Introduction	10
5.3 Firmware Update	11
5.3.1 Firmware Interface	11
5.3.2 New Firmware Request.....	11
5.3.3 Firmware download and update.....	11
Chapter 6: Product Test	12
6.1 Operating Test	12
6.2 Environmental Test.....	12
6.3 ESD	12
6.4 Linearity Test	12
6.5 Optical Inspection	12
6.6 Others	12
Chapter 7: Warranty.....	13
Chapter 8: Other Documents.....	13
Chapter 9: Contact Information	13

Chapter 1: Scope

1.1 Products

The 7" projected capacitive touch panels (AMT named it as 'PCI') with PenMount control boards, their part no. are:

- P3012-02A: 7" PCI with 1.1mm plain glass on top
- P3012-01A: 7" PCI without top glass, this item is only offered to specific partners

The above touch panels are used the same PenMount control board, the part no. of this control board is PenMount 1201A (AMT named it as PM1201A).

1.2 Part no. Definition

The entire part number of this PCI products is presented as 92-P30nn-xyz, code "nn" is the sequence number of AMT standard stock PCI items and the last 3 codes of the part number represent which types of controller/glass/version are used and they are shown as follows:

92 - P 3 0 n n - x y z

x Code	Description
0	Use PenMount control board

y Code	Description
1	No top glass on the PCI touch
2	Use AMT defined plain glass

z Code	Description
0	Version
A	Version

For example, if the product part no. is P3012-02A, the last three codes represent that PenMount control board, AMT defined plain glass and version A are used in this product.

1.3 Serial no. Identification

The serial no. below is an example from a 15.6" touch panel. The sticker is on the PCI tail side, it shows the serial no. of this PCI touch panel as the picture below, it contains one letter and 15 digits for projected capacitive touch panels. The example below explains the serial no. representations of AMT's products:



1 Part no. P3012	2 Which types of controller / glass / version are used (refer to section 1.2)	3 Production Year, 2012	4 Production Week, week 29	5 Serial numbers
----------------------------	--	-----------------------------------	--------------------------------------	----------------------------

Chapter 2: Product Specifications

2.1 Mechanical Specification

Touch Panel Mechanical Specification:

Part No.	P3012-02A	P3012-01A
Touch Panel Size	7"	
Total Thickness (mm)	1.7 ± 0.2	0.6 ± 0.15
Thickness of Top glass (mm)	1.1	n/a
Outside Dimension L x W (mm)	172.60 x 113.44	171.60 x 112.44
View Area L x W (mm)	160.60 x 98.44	
Active Area L x W (mm)	153.60 x 91.44	
Surface Finish	Clear Type	n/a
Haze	<3%	
Light Transmission rate	87 ± 3%	
Construction	GFFF	AFFF

Note: n/a: Not Available AFFF: OCA-Film-Film-Film GFFF: Glass-Film-Film-Film

PM 1201A Control Board Mechanical Specification:

Control Board Part No.	PM1201A Control Board
Support Touch Screen Size	For 5.0" to 7.9" PCI
Touch Controller	PenMount P2-03
Connector pins	Two 20 pins +30 pins ZIF connector for PCI touch screen FPC tail, one USB connector for 4-pin USB cable (optional) , and one RS232 connector for 5-pin RS232 cable (optional)
Mechanical Size L*W (mm)	30 x 80
Max. support Sensing Lines	15
Max. support Driving Lines	24
EMC Spec.	IEC61000-4-3 Level 2 certified. (RS: Passed 3V/m testing) IEC61000-4-6 Level 2 certified. (CS: Passed 3Vrms testing)



2.2 Mechanical Dimension

The followings are the drawings of P3012-02A, P3012-01A and PM 1201A control board. If you need more detailed drawings or information, please visit our website and choose "support & download", click on the item you need and then download.

2.2.1 Touch Panel Mechanical Drawing and Real Product View

P3012-02A : 7" PCI with 1.1mm top glass




Front View

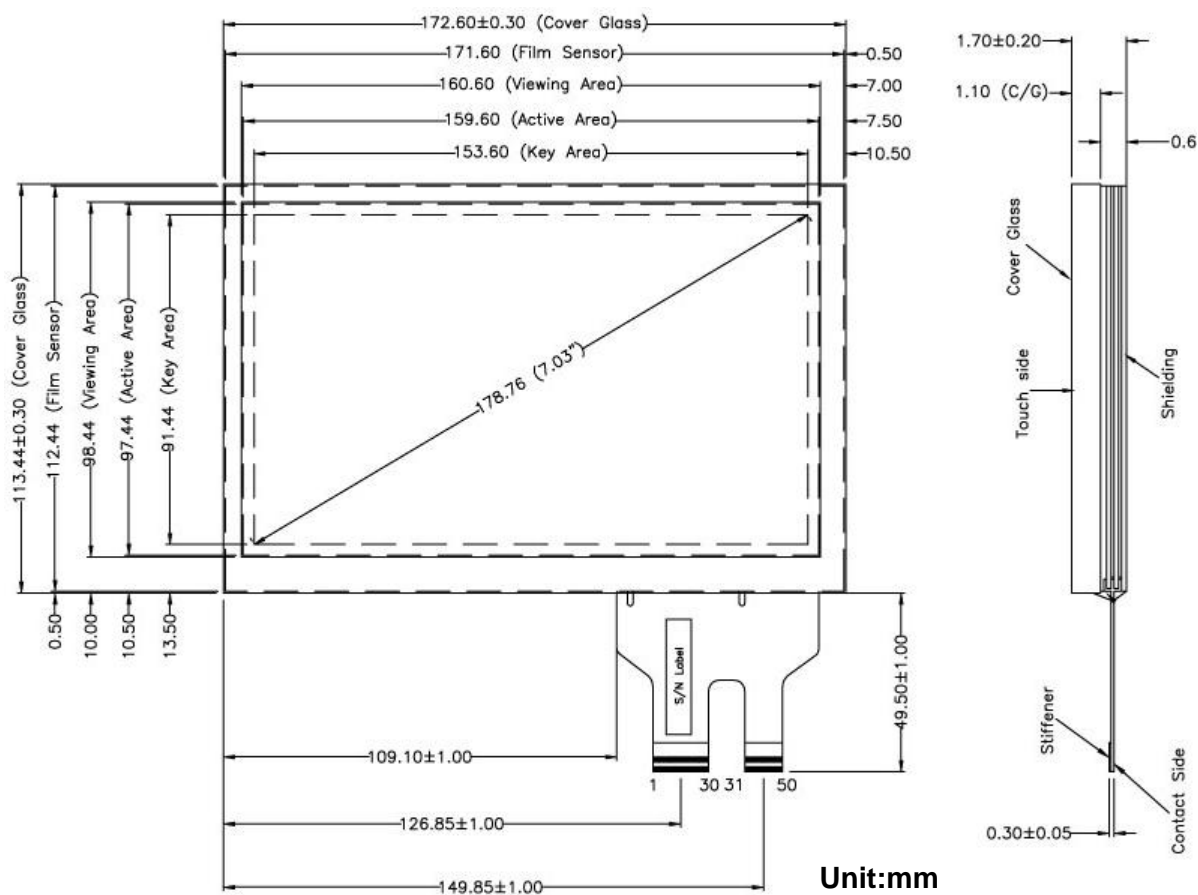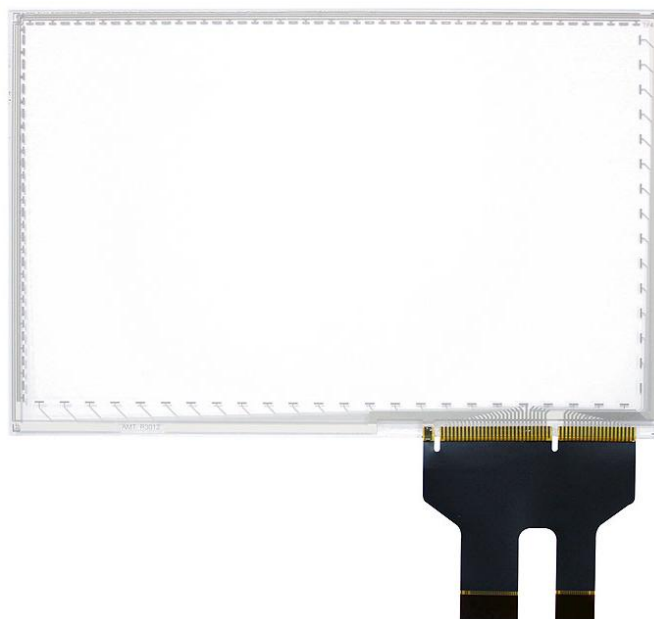

AMT 7" PCI Touch Solution Datasheet

P3012-01A : 7" PCI without top glass

Front View

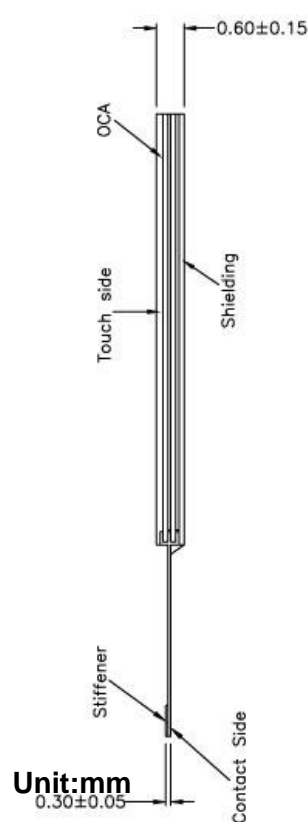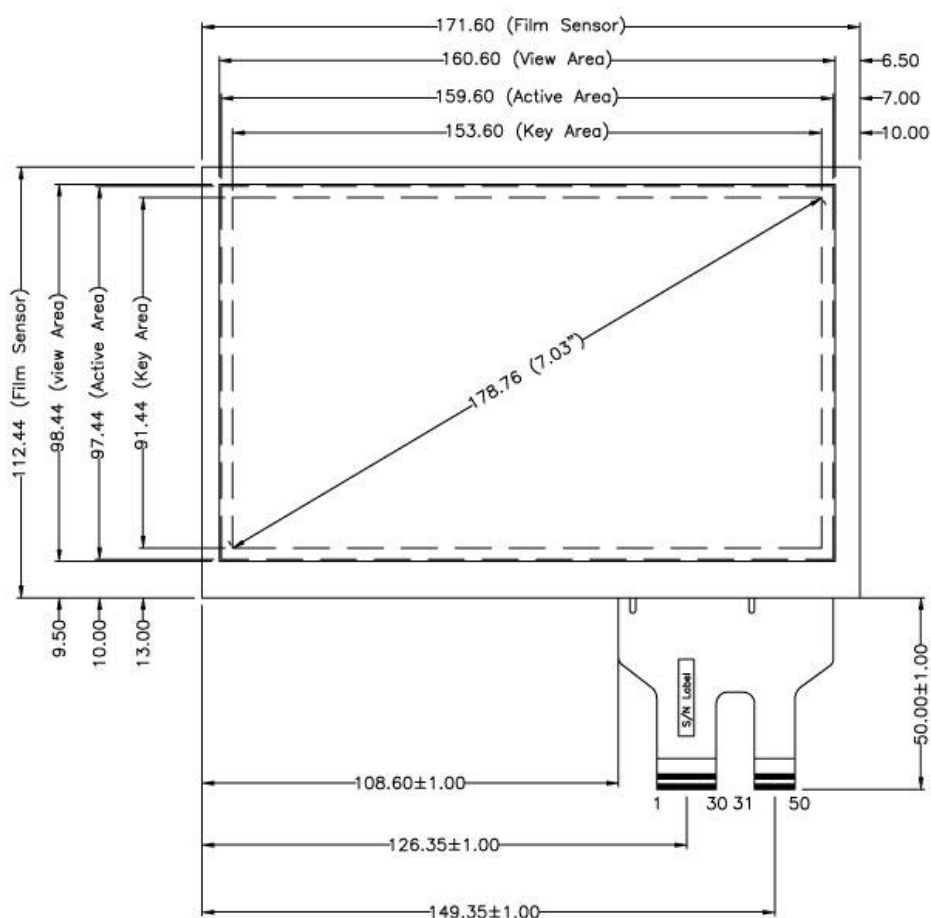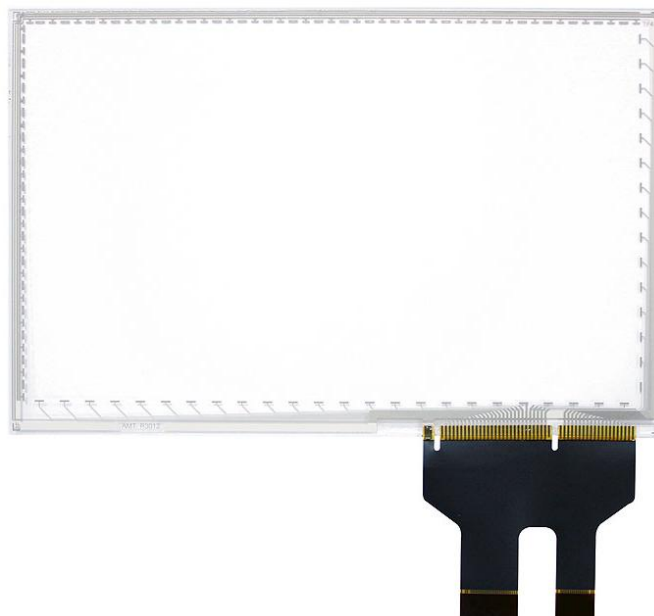


Remark: Item P3016-010 is only available for AMT's selected partners.


AMT 7" PCI Touch Solution Datasheet

2.2.2 PM1201A Control Board Mechanical Size and Rear/ Front View


Mechanical Size:

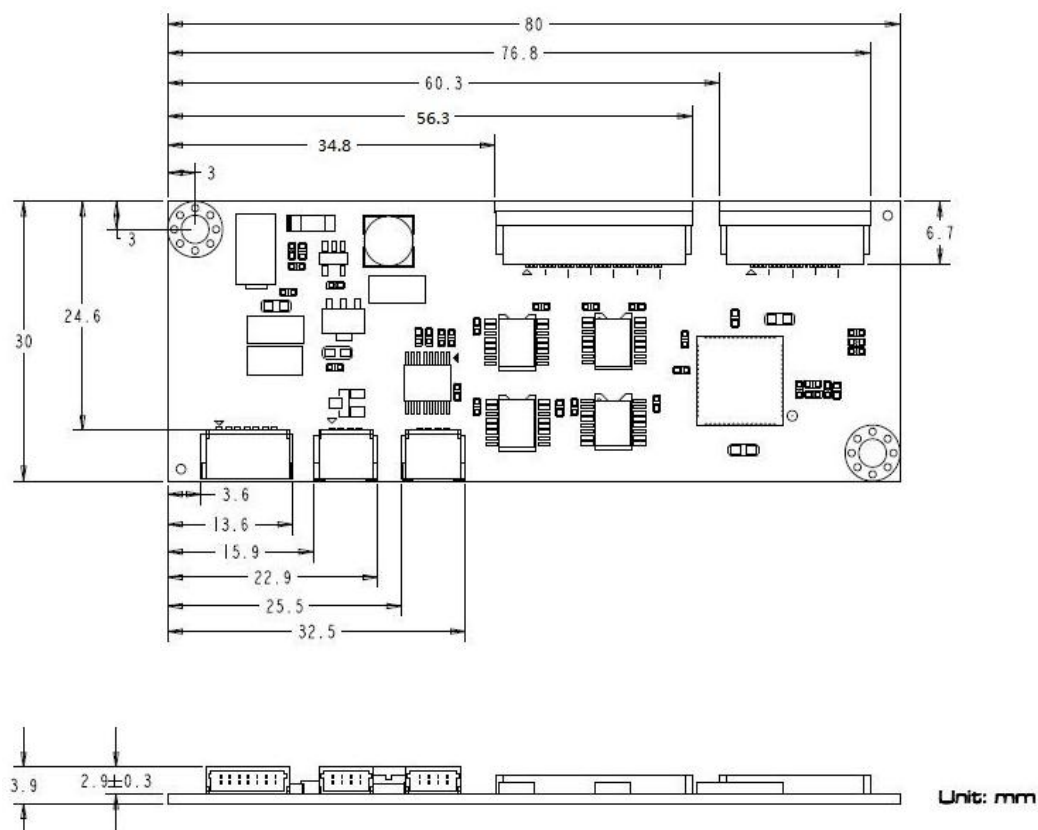

Front View

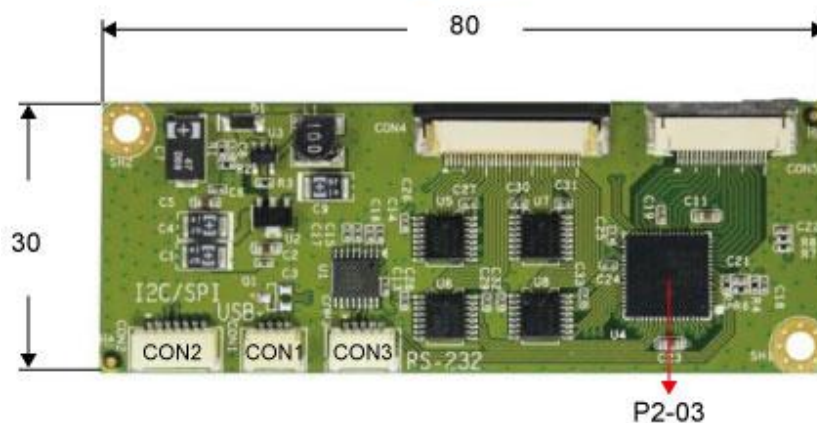

Rear View

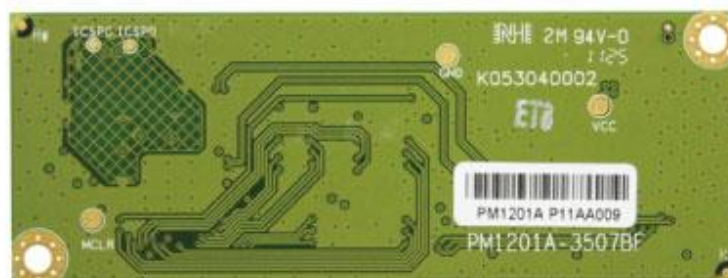

Chapter 3: PM1201A Control Board Hardware Specifications

3.1 Interface Specifications

There are five connectors on this board: 20PIN & 30PIN ZIF connectors for PCI touch screen FPC cable, one USB connector for 4-pin USB cable (optional) , and one RS232 connector for 5-pin RS232 cable (optional) , and one 7-pin connector, the pin definition is set as below:

CON1 / 4PIN / USB	
PIN NO.	DESIGNATION
1	5VIN
2	D-
3	D+
4	Ground

CON3 / 5PIN / RS-232	
PIN NO.	DESIGNATION
1	5VIN
2	RXD
3	TXD
4	Ground
5	Ground

CON2 / 7PIN	
PIN NO.	DESIGNATION
1	N/A
2	N/A
3	N/A
4	N/A
5	N/A
6	N/A
7	N/A

3.2 Control Board System Block Diagram

3.3 Interface

USB connectors are provided for connecting this control board to your system. The followings are the functions, pin numbers and designations for different interfaces.

3.3.1 USB Interface and Data Communication

USB (Universal Serial Bus) is an industry standard, which is a connection between the computer/ notebook/ laptop and the external devices. It is commonly used in connecting to PC or handheld device. There are 4 pins on PM1201A control board to define USB connection.

CON1 / 4PIN / USB	
PIN NO.	DESIGNATION
1	5VIN
2	D-
3	D+
4	Ground

3.3.2 RS-232

RS-232 (Recommended Standard 232) is the traditional name for a series of standards for serial binary single-ended data and control signals connecting between a DTE (Data Terminal Equipment) and a DCE (Data Circuit-terminating Equipment). It is a specification for serial communications between a DCE and DTE (eg, computer and modem); it defines electrical characteristics, the 25-way 'D' connector and the various functions of the various signal lines. Here is the pin definition for RS-232 interface of PM1201A control board:

CON3 / 5PIN / RS-232	
PIN NO.	DESIGNATION
1	5VIN
2	RXD
3	TXD
4	Ground
5	Ground

Chapter 4: PenMount PCI Controller IC Specifications

4.1 General Descriptions

Touch Controller IC	PenMount P2-03
Interface	USB: Full-speed, 12Mbps RS-232 Interface 38400 baud rate / 8bit data / non parity / one stop bit / non-PnP
ADC resolution	10 bits
Operating Voltage	+5V DC
Storage Temperature	-40°C ~ +85°C
Operating Temperature	-20°C ~ +70°C
Power Consumption	Typical – Working Mode: 37 mA / 5V; Idle Mode: 19 mA / 5V; Sleep Mode: 3.75 mA / 5V;
Sample rate/second	>100sps
Touch media	Finger, gloved hand (please contact us for details)
Firmware	Develop by PenMount team
Operation force	Light
Top glass thickness supported	Up to 6mm
Driver supports	All popular O.S., like Microsoft Windows and Win CE and various Linux distribution

Note: Sample rate/second are varied based on different versions of firmware and touch panel.
PenMount P2-0 is using Microchip PIC24FJ64GB106 IC.

4.2 Control IC Features


- Charge Time Measurement Unit(CTMU)
- 16 MIPS operation at 32MHz CPU
- 256KB program memory
- 10-bit, up to 16 channel Analog-to-Digital converter
- On-Chip 2.5V Voltage Regulator
- Run mode: 1mA/MIPS, 2.0 Typical
- Sleep mode: Current down to 100nA Typical
- Standby Current with 32 KHz Oscillator: 2.5uA, 2.0V typical
- USB, RS-232 serial bus
- Other details controller specification, please refer to Microchip PIC24FJ64GB106 datasheet

4.3 Firmware Features

- On Field-update firmware
- Support controller power-saving : working, idle (No touch slow-scanning), and sleep (USB suspend)
- Signal sensitivity tuning capability
- With noise filter feature on firmware
- Perform smoothing & jitter filter for drawing
- Touch panel rotation with X-Y coordinate reverse and/or swap
- Touch linearity compensation in border area
- High sampling rate
- Multi-sensing to increase scan speed

AMT 7" PCI Touch Solution Datasheet

4.4 Controller IC Pin out

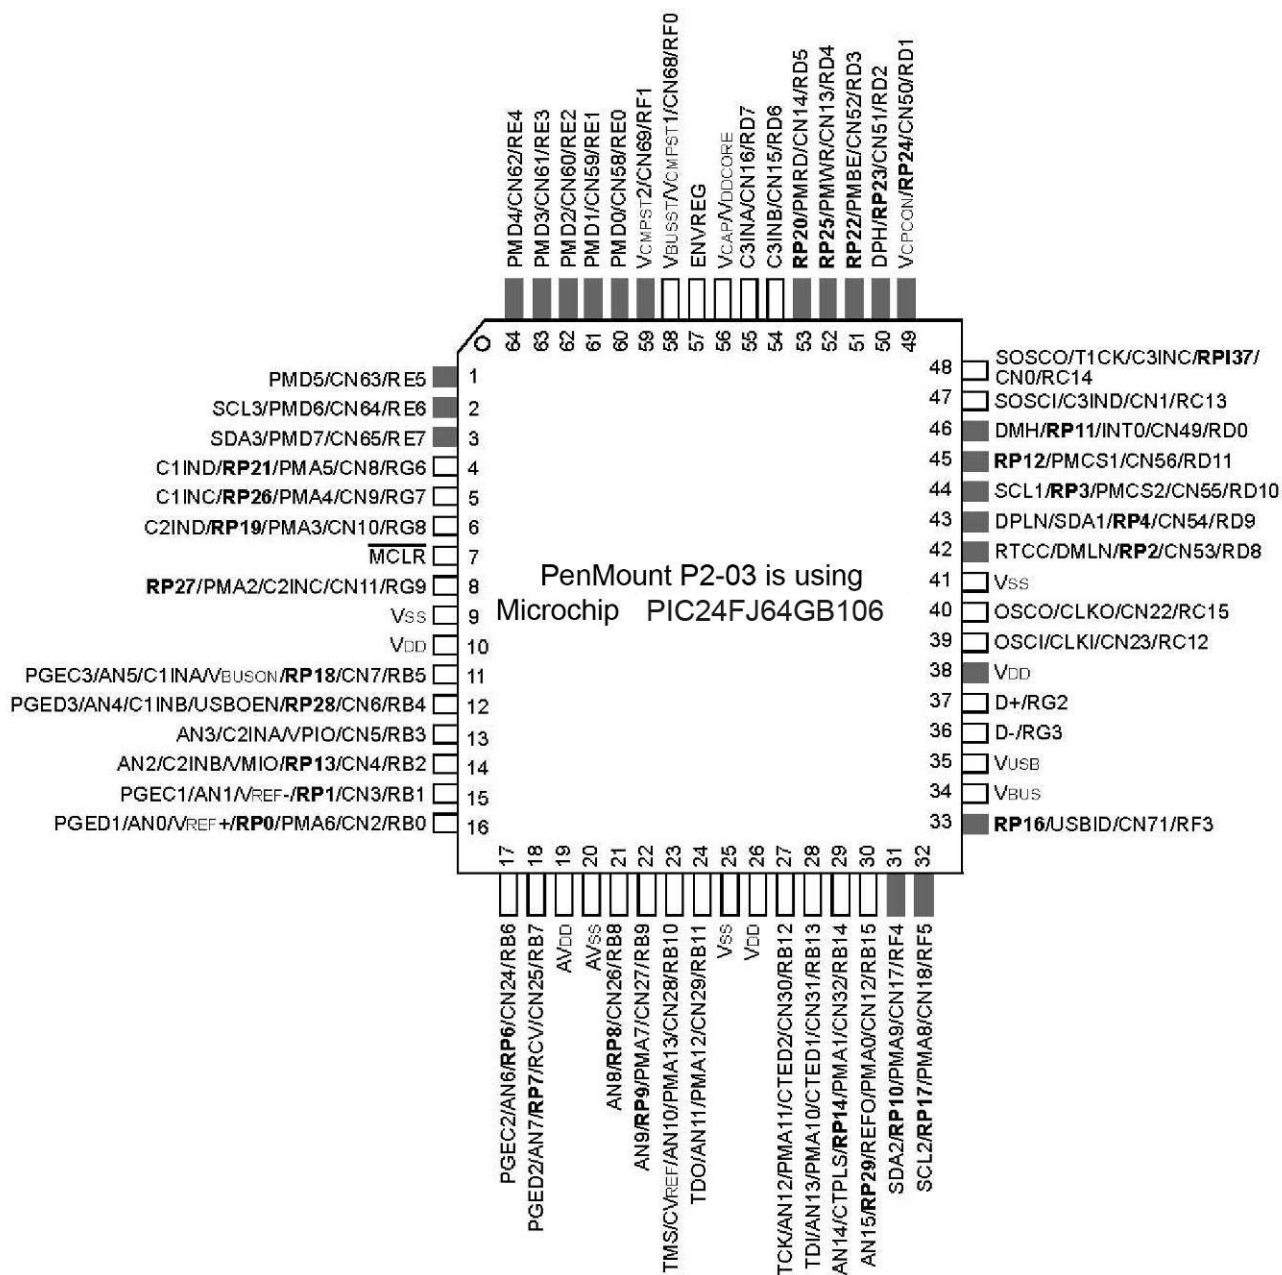

Legend: Shaded pins indicate pins tolerant to up to +5.5 VDC.

RPn represents remappable pins for the Peripheral Pin Select feature.

Note 1: For QFN devices, the backplane on the underside of the device must also be connected to VSS.

Chapter 5: Software Drivers & PenMount Utility

5.1 Available Drivers & Where to Download

Drivers for USB and RS-232 are available in AMT's website, please go to the link below for downloading the drivers you need.

<http://www.amtouch.com.tw/support-downloads/penmount-drivers-and-utilities/pci-touch-controller/1000-series-linux-and-other-drivers/>

Please note that if you use USB interface and Windows Vista/7/8, the default driver is available inside the OS, so you no need to download and install an additional driver. The drivers will be modified and updated from time to time, the most updated drivers are available in AMT and PenMount website. Drivers' versions are subject to change without notice.

PM1201 drivers:

For USB / RS-232

Windows 2000, XP, 2003: single touch, mouse driver.


Windows Vista: single touch, inbox driver.

Windows 7,8: dual touch, Inbox driver.

Linux: Ubuntu, Android, other Linux distributions under development.

5.2 PCIMSet Introduction

PCIMSet is a utility software developed by PenMount for users to adjust the touch screen's accuracy, sensitivity... and others features. When you have AMT PCI touch kits, we provide you this utility program, so you can choose the appropriate interface through PCIMSet setting. If you need more detailed information, please see chapter 3 "PenMount PCIMSet" of PenMount Projected Capacitive Input (PCI) User Guide.

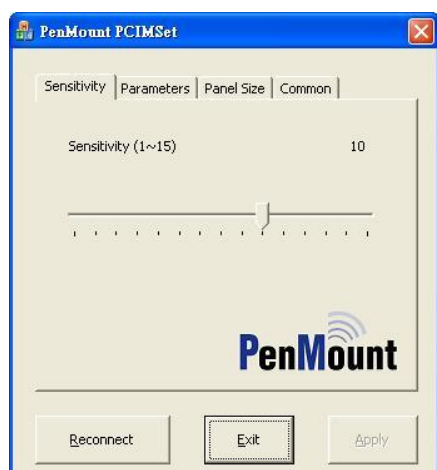

5.3 Firmware Update

5.3.1 Firmware Interface

We provide USB and RS-232 interface in firmware, the shipping default is set at USB interface, and you can change the interface to RS-232 by PCIMset utility if the USB interface is not required by your system. The interface changing method is in our PenMount Projected Capacitive Input (PCI) User Guide. Once there is any new firmware going to be updated, the details are all described in our User's Guide, please read it carefully before making the firmware update.

5.3.2 New Firmware Request

The latest PenMount controller firmware version is programmed inside the chip. PenMount controller firmware is able to be renewed in customer side, PenMount will release the new firmware with new features or modification, the new updated firmware is available in AMT or PenMount customer services team. As the new updated firmware is sent by request, if you need to update the new firmware, please follow the updated firmware request procedures as below:

- a. First, please fill in the 'PenMount PCI Firmware Update Request' (FUR) form. The FUR form is sent by request, so please contact our sale representatives, customer services team or distributors in your region for requesting the FUR form.
- b. Sent back the FUR form to AMT or PenMount sale representatives, customer services team or distributors in your region.
- c. After checking and confirmed by AMT or PenMount team, we will send the updated firmware for customers to do on field update.

5.3.3 Firmware download and update

The PenMount field update utility (Pmfu) is developed for users to update the latest firmware version. Please note that only our standard firmware offers a free update service, if it is a special developed firmware in accordance with the requests of the client, or any adjustment has been made for the firmware due to the requests of the client, these are regarded as a special firmware, and they won't have a free firmware update. The firmware update will be provided once we have a new firmware ready. If you need any further information about this, please contact our sale representatives or distributors in your region. And if you want to get more information about the operation steps of PenMount Pmfu, you can read chapter 4.1 & 4.2 of the PenMount Projected Capacitive Input (PCI) User Guide.

Chapter 6: Product Test

The following test has been done by AMT Projected Capacitive Touch and PenMount controller or Control board.

6.1 Operating Test

PCI Touch panels were tested under the temperatures range at -20°C and $+70^{\circ}\text{C}$, the PCI touch panels can operate normally under the above temperature.

6.2 Environmental Test

PCI touch panels were tested under the temperature:


- -40°C for 288H,
- 60°C with 90RH for 288H,
- 80°C for 288H,
- $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ for 20 cycles.

Touch panels can operate normally after the test, please see PCI approval sheet for details.

6.3 ESD

PCI touch solution can withstand 15KV air discharge and 8KV contact discharge. However, the PCI touch has to be integrated properly with good grounding.

6.4 Linearity Test

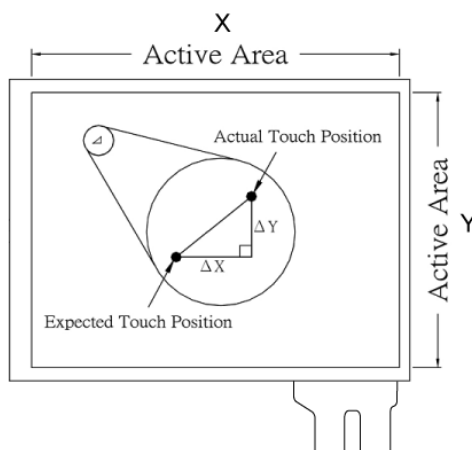

This test is to calculate the difference between the actual touch position and the expected touch position, which

$$\frac{\Delta X}{X}\% < 1.5\% \quad \text{and} \quad \frac{\Delta Y}{Y}\% < 1.5\%$$

6.5 Optical Inspection

AMT PCI has its optical specification, please refer to AMT PCI optical specification A003.

6.6 Others

For other test, please contact to our sale representatives or distributors for detailed information.

Chapter 7: Warranty

We provide one year limited liability warranty. We shall not be held responsible for any damage, destroy or defect caused by accident, misinstallation, misunderstanding of the instructions, customer modification, misuse of software or their use in a defective or deficient environment or any misuse during their operation of the touch panels.

Chapter 8: Other Documents

The following documents can be provided to our clients for guiding our customers how to install and operate our products:

- AMT PCI Integration Guide—AMT PCI Integration guide is the guide that to instruct you how to install the touch panel into your products, and what you should aware of.
- AMT PCI Design Guide—AMT PCI Design Guide describes the general design rules and requirements for AMT projective capacitive input (PCI) touch panels, such as their structure, size, pattern and lines.
- PCI PenMount 1000 Device Driver Development Guide—it provides necessary information about the protocols for PenMount and guide you to operate the USB, RS-232 and I²C protocols of PenMount 1000.
- PenMount Projected Capacitive Input (PCI) User Guide—it contains detailed information of our touch Screen kits, such as what software you need, how to install drivers, what is PenMount PCIMSet and firmware update instructions and etc. You can go to the link below to download the manual/ PenMount Projected Capacitive Input (PCI) User Guide.

<http://www.amtouch.com.tw/support-downloads/manuals-downloads/>

Note: AMT PCI Integration Guide, AMT PCI Design Guide and PCI PenMount 1000 Device Driver Development Guide are sent by request, so please contact our sale representatives or distributors in your region for request if you need these guides. Document versions are subject to change without notice.

Chapter 9: Contact Information

Headquarter

Apex Material Technology Corp.

No. 84, WuXun Street, Anle District,
Keelung City 20446, Taiwan R.O.C.

Tel : + 886-2-2430 2666

Fox: + 886-2-2430 3255

Email: amt1@amtouch.com.tw

Web : www.amtouch.com.tw

The North American Sales Office

AMTouch USA, Inc.

5050 W. State Street

Milwaukee, WI 53208, USA

Tel : + 1-414-847-1814/15

Fax : + 1-414-445-1968

Website: www.amtouchusa.com

Email: sales@amtouchusa.com