



中显液晶
技术资料



型号: ZX240128C

2009年3月15日

北京市海淀区中关村大街32号和盛大厦811室
电话：(86)-010-52926620 传真：(86)-010-52926621
企业网站：<http://www.zxlcd.com>

目 录

(一) 显示特性 (1)

(二) 机械特性 (1)

(三) 模块图(2)

(四) 限定参数 (2)

(五) 电气特性及使用说明(2)

(六) 光学特性 (5)

(七) 可靠性 (8)

(八) 注意事项(9)

4 Display Specification

1.1 Display type: STN

1.2 Display color

Display color: Blue-Black

Background color: Yellow-Green

1.3 Polarizer mode: Positive

Reflective


1.4 Viewing Angle: 6:00

1.5 Driving Duty: 1/128

1.6 Backlight: LED

- Color tone is slightly changed by temperature and driving voltage。

2 Mechanical Specifications

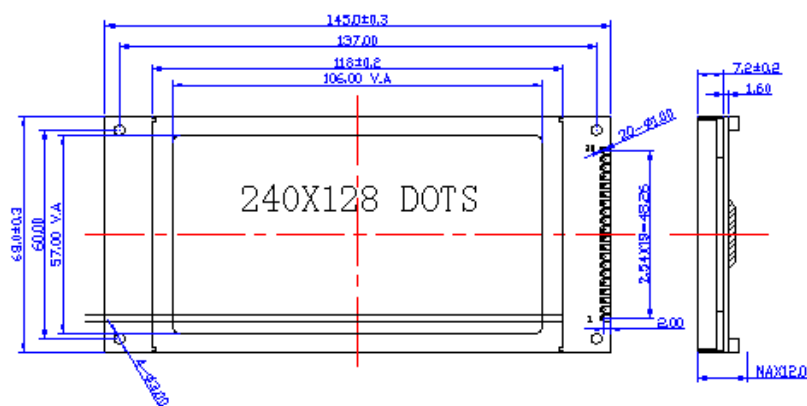


2.1 Outline Dimensions

2.2 Dot Matrix: 240×128

2.3 Dot size: 0.40×0.40(mm)

2.4 Dot pitch: 0.45×0.45(mm)

3 Circuit Block Diagram

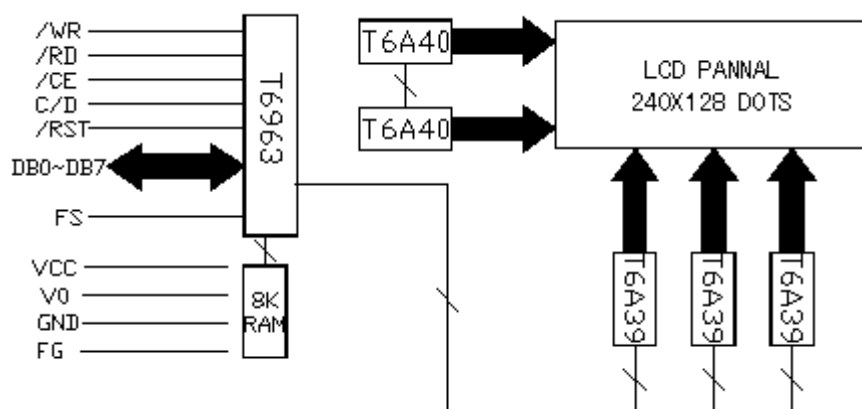

4 Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit	Remark
Power Supply Voltage	VDD-VSS	0	7.0	V	
LCD Driving Voltage	VDD-VEE	---	18.0		
Operating Temperature Range	Top	0	50	℃	NO Condensation
Storage Temperature Range	Tst	-20	60		

5 Electrical Specifications and Instruction Code

5.1 Electrical Characteristics


Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Supply Voltage(logic)	VDD-VSS	4.5	5.0	5.5	V	
Supply Voltage(LCD Drive)	VSS-VEE	---	6.0	---	V	
Input Signal Voltage	“H” Level	VIN	VDD-2.2	---	V	
	“L” Level	VIL	0	0.8	V	
Supply current(logic)	IDD	---	24	---	mA	

Supply current (LCD Drive)	IEE	---	2.0	---	mA	
----------------------------	-----	-----	-----	-----	----	--

5.2 Interface Signals

Pin NO.	Symbol	Description(Function)	Remark
1	VSS	Ground	
2	VDD	Supply voltage for logic and LCD(+)	
3	V0	Operating voltage for LCD	
4	C/D	Command/Data Selection	variable
5	RD	Data Read from T6963C	
6	WR	Data Write into T6963C	
7	DB0	Data bit 0	
8	DB1	Data bit 1	
9	DB2	Data bit 2	
10	DB3	Data bit 3	
11	DB4	Data bit 4	
12	DB5	Data bit 5	
13	DB6	Data bit 6	
14	DB7	Data bit 7	
15	CE	Chip enable Signal	
16	Reset	Reset signal	
17	VOUT		
18	FS	Font Selection	
19	LED(+)	LED or EL Backlight	
20	LED(-)	LED or EL Backlight	

5.3 Interface Timing Chart:

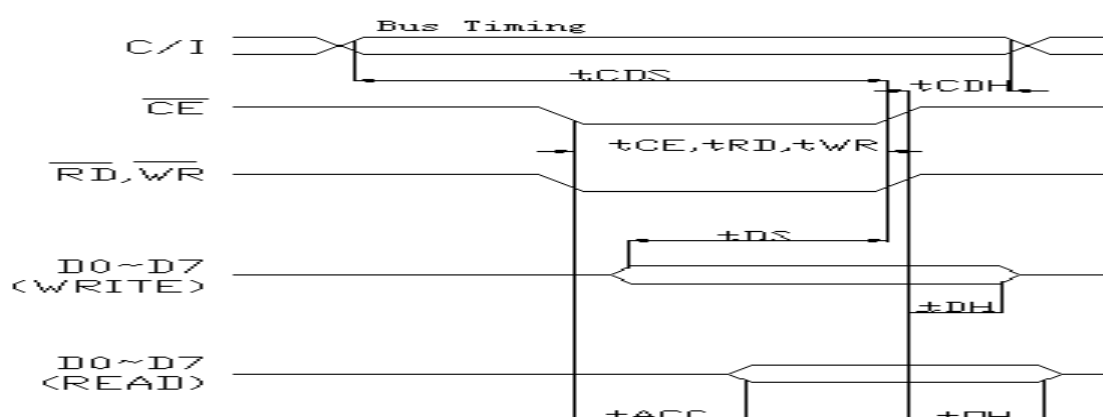

Unless otherwise specified, VDD=5.0 ± 10%, VSS=0V, Ta=-10~70°C

Item	Symbol	Test Condition	MIN	MAX	UNIT
C/D Set up Time	t_{CDS}		100	--	ns
C/D Hold Time	t_{CDH}		10	--	ns

CE,RD,WR Width	tCE,tRD,tWR		80	--	ns
Data Set up Time	tDS		80	--	ns
Data Hold Time	tDH		40	--	ns
Access Time	tACC		--	150	ns
Output Hold Time	tOH		10	50	ns

5.4 Instruction Code

COMMAND	CODE	D1	D2	FUNCTION
REGISTERS	00100001	X address	Y address	Set Cursor Pointer
	00100010	Data	00H	Set Offset Register
	00100100	Low address	High address	Set Address Pointer
SETTING	01000000	Low address	High address	Set Text Home Address
	01000001	Columns	00H	Set Text Area
	01000010	Low address	High address	Set Graphic Home Address
	01000011	Columns	00H	Set Graphic Area
SET CONONTROL WORD	1000x000	--	--	OR mode
	1000x001	--	--	EXOR mode
	1000x011	--	--	AND mode
	1000x100	--	--	Text Attribute mode
	10000xxx	--	--	Internal CG ROM mode
	10001xxx	--	--	External CG RAM mode
MODE SET	10010000	--	--	Display off
	1001xx10	--	--	Cursor on, blink off
	1001xx11	--	--	Cursor on, blink on
	100101xx	--	--	Text on, graphic off
	100110xx	--	--	Text off, graphic on
	100111xx	--	--	Text on , graphic on
DISPLAY MODE	10100000	--	--	1-line cursor
	10100001	--	--	2-line cursor
	10100010	--	--	3-line cursor
	10100011	--	--	4-line cursor
	10100100	--	--	5-line cursor
	10100101	--	--	6-line cursor
	10100110	--	--	7-line cursor
	10100111	--	--	8-line cursor
CURSOR PATTERN ELECT	10110000	--	--	Set Data Auto Write
	10110001	--	--	Set Data Auto Read
	10110010	--	--	Auto Reset
DATA AUTO READ/WRITE	11000000	--	--	Data Write and Increment
	11000001	--	--	Data Read and Increment
	11000010	--	--	Data Write and Decrement
	11000011	--	--	Data Read and Decrement
	11000100	--	--	Data Write and Non variable
	11000101	--	--	Data Read and Non variable
SCREEN PEEK	11100000	--	--	Screen Peek
SCREEN COPY	11101000	--	--	Screen Copy
BIT SET/RESET	11110xxx	--	--	Bit reset
	11111xxx	--	--	Bit set
	1111x000	--	--	Bit0(LSB)
	1111x001	--	--	Bit1
	1111x010	--	--	Bit2

	1111x011	--	--	Bit3
	1111x100	--	--	Bit4
	1111x101	--	--	Bit5
	1111x110	--	--	Bit6
	1111x111	--	--	Bit7(ZXB)

5.5 Character Code Map

LSB MSB	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	!	"	#	\$	%	&	'	(	)	*	+	,	-	.	/	
1	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	?
2	0	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
3	P	Q	R	S	T	U	U	W	X	Y	Z	[	\	]	^	_
4	'	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
5	P	q	r	s	t	u	v	w	x	y	z	{		}	~	
6	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0
7	E	a	E	0	0	0	0	0	9	0	0	0	E	*	R	


6 Optical Characteristics

6.1 Optical Characteristics Ta=25℃


Item		Symbol	Condition		Min.	Typ.	Max.	Unit	Remark
Viewing angle		θ_x	Cr	$\theta_y=0^\circ$	-20	----	20	deg	
		θ_y	>3	$\theta_x=0^\circ$	-25	----	-25		
Contrast Ratio		Cr	$\theta_x=0^\circ$ $\theta_y=15^\circ$		3				
Response	Turn on	Ton	$\theta_x=0^\circ$				200	ZX	
Time	Turn off	Toff	$\theta_y=0^\circ$				360		

6.2 Definition of optical characteristics

6.2.1 Definition of viewing Angle(see fig.as follow)

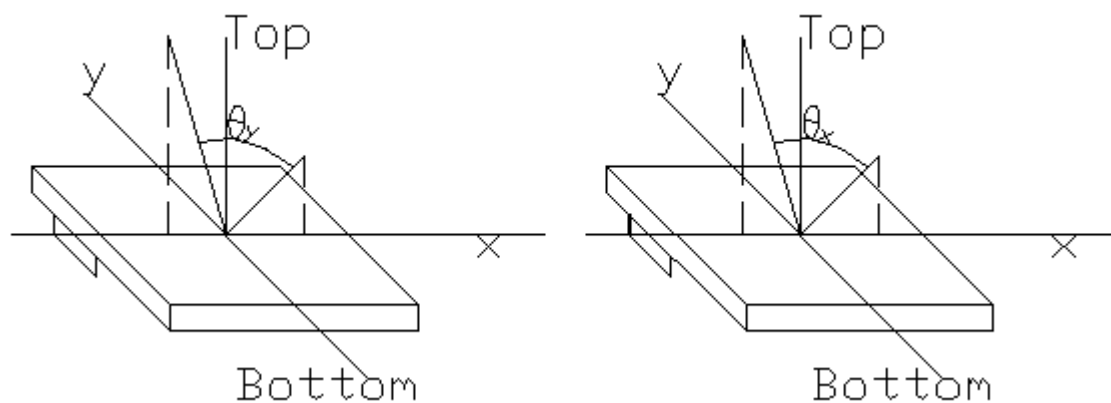

6.2.2 Definition of Contrast Ratio(see fig.as follow)

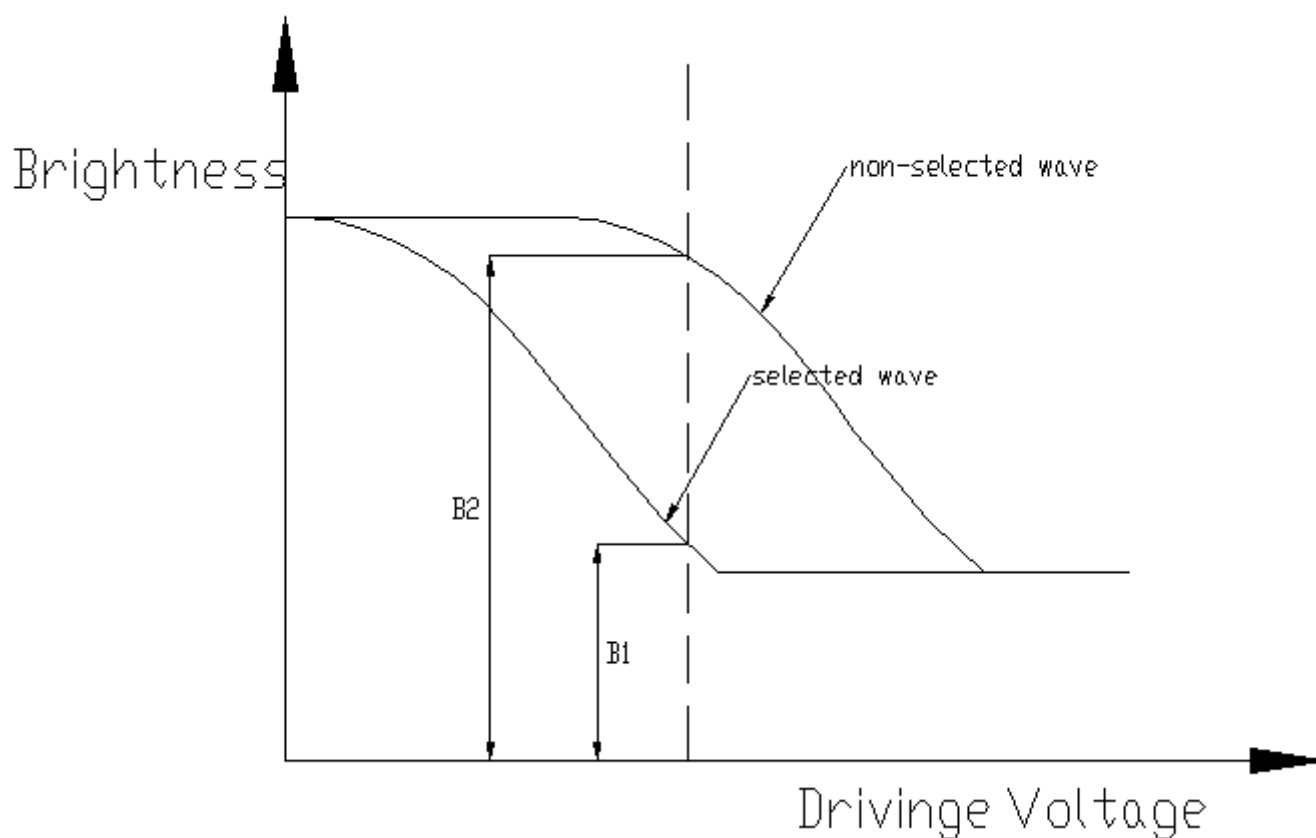


$$\text{Contrast Ratio}(K) = \frac{\text{non-selected state brightness}}{\text{selected state brightness}} = \frac{B2}{B1}$$

Measuring Conditions:

- 1) Ambient Temperature: 25℃; 2) Frame frequency : 32Hz

6.2.3 Definition of Response time (see fig.as follow)

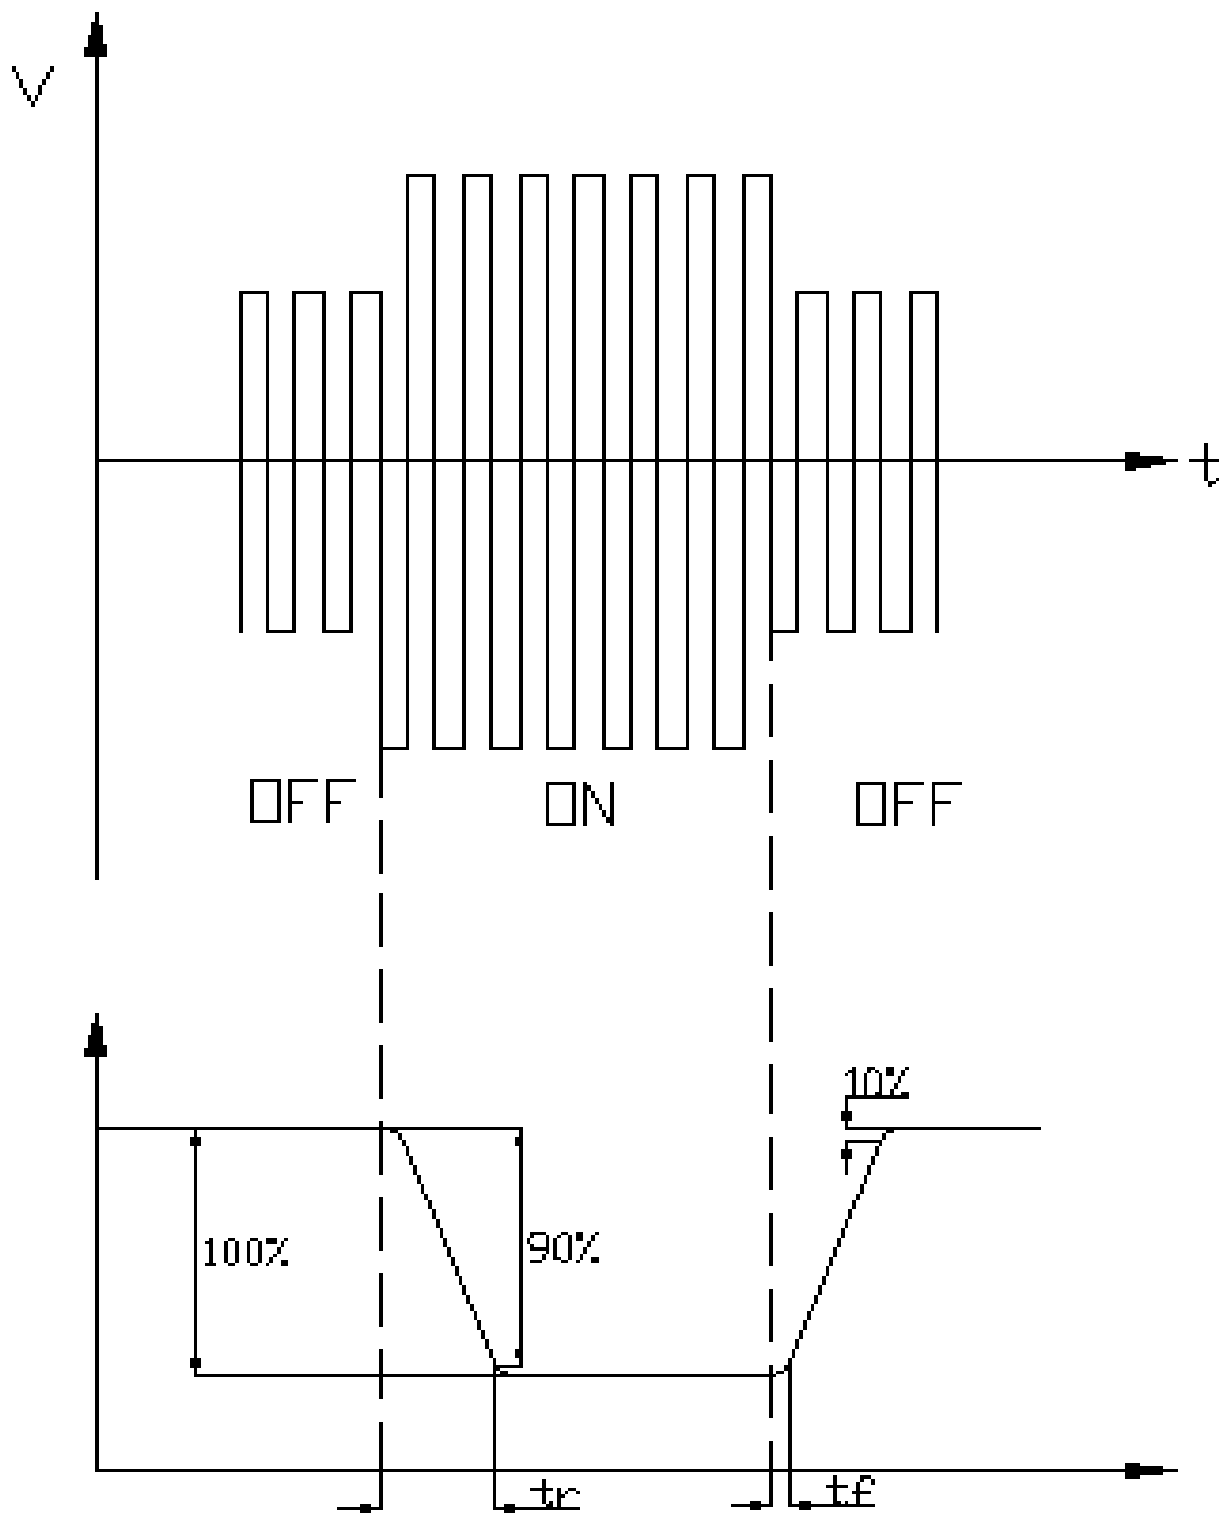

7 Reliability

7.1 Content of Reliability Test

NO.	Test Item	Content of Test	Test condition
1	High Temperature Storage	Endurance test applying the high storage temperature for a long time	60°C 96H
2	Low Temperature Storage	Endurance test applying the low storage temperature for a long time	50°C 96H
3	High Temperature	Endurance test applying the Temperature electric stress (voltage	50°C

	Operation	¤t) and the thermal stress to the element for a long time	96H
4	High Temperature Operation	Endurance test applying the Temperature electric stress (voltage ¤t) and the thermal stress to the element for a long time	0℃ 96H
5	High Temperature /Humidity Storage	Endurance test applying the high temperature and high humidity storage for a long time	40℃ 90%RH 96H
6	Temperature Cycle	Endurance test applying the low and high temperature cycle 10 cycle -20℃--25℃--60℃--25℃ 30min 5min 30min 5min 1cycle	-20℃/60℃
7	Vibration Test (package state)	Endurance test applying the vibration during transportation	10Hz~55Hz ~10Hz 1.5mmP-P,1.5g X.Y.-5mm
8	Shock Test (package state)	Endurance test applying the shock during transportation	Drop a product form a height of 79cm to a solid unbending and horizontal plane
9	Atmospheric Pressure Test	Endurance test applying the atmospheric prssure during transportation by air	40kPa 24H

7.2 Failure Judgment Criterion

Criterion Item	Test Item NO.									Failure Judgement Criterion
	1	2	3	4	5	6	7	8	9	
Basic Specification	0	0	0	0	0	0	0	0	0	Out of the basic Specification
Electrical Specification	0	0	0	0	0					Out of the electrical specification
Mechanical Specification						0	0	0		Out of the mechanical specification
Optical Characteristic	0	0	0	0	0	0				Out of the optical specification
Remark	Basic specification = Display specification + Mechanical specification									

8. Precautions for use of LCD Modules

8.1 Handling Precautions

8.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

8.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your

mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

8.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

8.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

8.1.5 If the display surface become contaminated, breathe on the surface and gently wipe it with a soft dry cloth. if still not completely clear, moisten cloth with one of the following solvents:

-----Isopropyl alcohol

-----Ethyl alcohol

Solvents other than those mentioned above may damage the Polarizer. Especially, see the following:

-----Water

-----Ketone

-----Aromatic solvents

8.1.6 Do not attempt to disassemble the LCD Module

8.1.7 NC terminal should be open. do not connect anything

8.1.8 If the logic circuit power is off, do not apply the input signals

8.1.9 To prevent destruction of the elements by electricity, be careful to maintain an optimum work environment

a. Be sure to ground the body when handling the LCD Modules

b. Tools required for assembly, such as soldering

c. irons, must be properly ground.

d. To reduce the amount of static electricity generated do not conduct assembly and other work under dry conditions.

e. The LCD Module is coated with a film to protect the

display surface. Be care when peeling off this protective film since static electricity may be generated.

以上使用说明由北京中显电子有限公司编制，有问题请电话联络，我们将竭诚为您服务，同时，提供完善的保修服务！因为每种液晶使用的控制器都不一样，控制器的型号基本就决定了液晶的指令形式和使用方式，所以，在说明书里一般不会详细照搬控制器说明书的每个细节，只会简要介绍常用指令，如果需要了解详细的指令和具体电气参数，请参照WWW.ZXLCD.COM网站里的“技术支持”菜单下，均有对应控制器手册免费下载，直接对应现有各类液晶使用的各种控制器，使用手册里一般有具体电气参数说明，指令详细介绍，同时辅以编程实例，以便客户详细参照，同时提高编程及操作技巧。

服务电话：010-52926620, 82626833

公司地址：北京市中关村大街 32 号蓝天和盛大厦 811 室