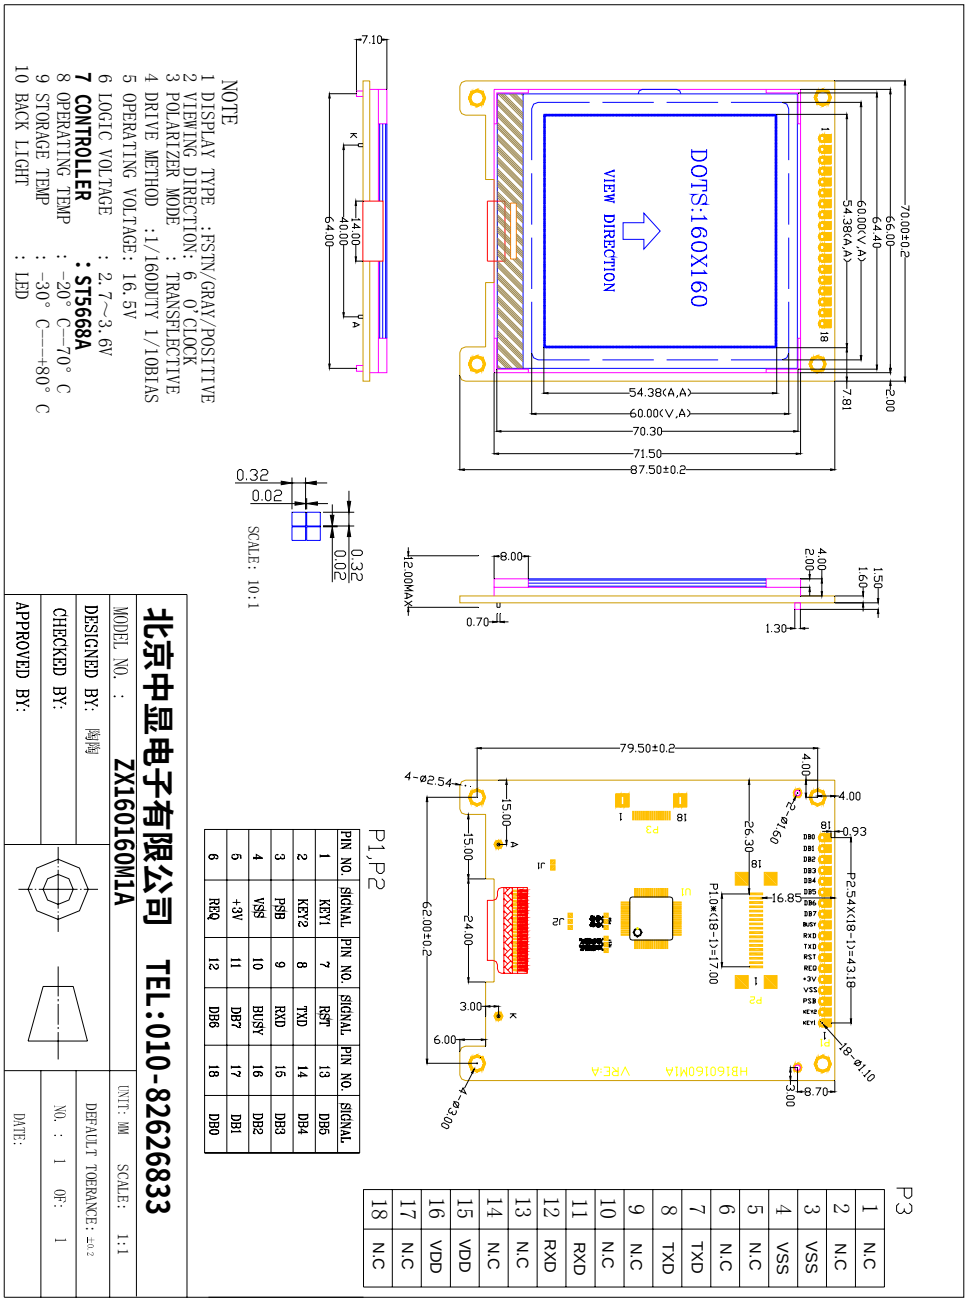
NOTE
1 DISPLAY TYPE :FSTN/GRAY/POSITIVE
2 VIEWING DIRECTION: 6 O'CLOCK
3 POLARIZER MODE : TRANSFLECTIVE
4 DRIVE METHOD :1/160DUTY 1/10BIAS
5 OPERATING VOLTAGE: 16.5V
6 LOGIC VOLTAGE : 2.7~3.6V
7 CONTROLLER : ST5668A
8 OPERATING TEMP : -20° C~70° C
9 STORAGE TEMP : -30° C~+80° C
10 BACK LIGHT : LED
DOTS:160X160
VIEW DIRECTION
SCALE: 10:1
北京中显电子有限公司 TEL:010-82626833
MODEL NO. : ZX160160M1A
UNIT: MM SCALE: 1:1
DESIGNED BY: 陶陶
DEFAULT TOERANCE: ±0.2
CHECKED BY:
NO. : 1 OF: 1
APPROVED BY:
DATE:
P1,P2
PIN NO. SIGNAL PIN NO. SIGNAL PIN NO. SIGNAL
1 KEY1 7 RST 13 DB5
2 KEY2 8 TXD 14 DB4
3 PSB 9 RXD 15 DB3
4 VSS 10 BUSY 16 DB2
5 +3V 11 DB7 17 DB1
6 REQ 12 DB6 18 DB0
P3
1 N.C
2 N.C
3 VSS
4 VSS
5 N.C
6 N.C
7 TXD
8 TXD
9 N.C
10 N.C
11 RXD
12 RXD
13 N.C
14 N.C
15 VDD
16 VDD
17 N.C
18 N.C

17.主控流程图